



**RIVA RACING**  
PERFORMANCE PRODUCTS & ACCESSORIES

## Yamaha 2-cylinder Power Filter Kit

*RY1301-KIT-2*



### Applications:

Yamaha SuperJet 1990~2020  
Yamaha WaveBlaster 1993-1996

### Approximate Installation Time:

0.5 hour

### Recommended Specialty Tools:

Part #

N/A

### Required Materials:

Part #

N/A

#### GET THE LATEST UPDATES!

Prior to installation, go to the RIVA Racing online Instruction Library to download the latest version of these instructions:

<https://rivaracing.com/instructions>



**RIVA RACING**  
PERFORMANCE PRODUCTS & ACCESSORIES

## Yamaha SuperJet Power Filter Kit

**RY1301-KIT-2**

### **COMPONENT LIST**

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>RIVA PART #</u>	<u>QTY</u>	<u>NOTES</u>
A	Carb Adapter Kit	RY1338-1	2	
B	Air Filter	RY1301-2-BK	2	
C	Pre-Filter	RY1301PF-B	2	

Your kit was inspected and verified before being carefully packaged by our staff. Please check package contents before beginning assembly. If you have a question about missing or damaged items please contact RIVA Technical Support directly at (954) 247-0705 or by e-mail at [tech\\_support@rivaracing.com](mailto:tech_support@rivaracing.com).

We strongly recommend the use of a service manual to familiarize yourself with the various components and procedures involved with this installation. Please note that some of the original hardware removed in the disassembly process will be used in the installation process. These instructions have been written in step-by-step format and refer to illustrations. Read through instructions entirely before performing installation. Please follow these step-by-step instructions and illustrations carefully.

**\*\*\* ALLOW ENGINE TO COOL COMPLETELY BEFORE PERFORMING INSTALLATION \*\*\***


**\*\*\* NO SMOKING \*\*\* NO SMOKING \*\*\* NO SMOKING \*\*\***

**Caution: Whenever using electric or battery operated tools inside the hull be sure it is well ventilated and no fumes are present. Failure to do so could result in a fire, or explosion and serious personal injury or death.**


**This kit is not intended for use on pollution controlled vehicles. Installation on pollution controlled vehicles may constitute a violation of state or local statutes.**

## - INSTALLATION INSTRUCTIONS -


Remove stock air intake cover (6 bolts) on carburetors and discard.

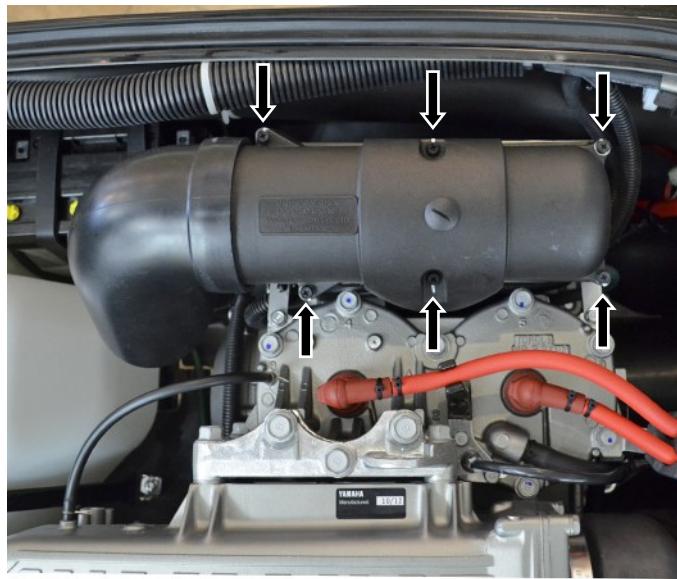


Remove stock air intake cover mounting plate (6 bolts).  
**NOTE: Be careful not to drop bolts into carburetors!**

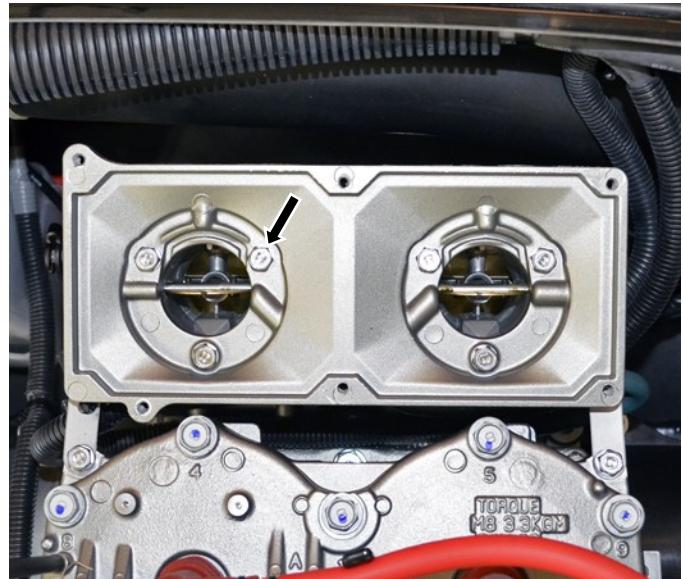

Remove internal spark arrestor screens (2) and discard.

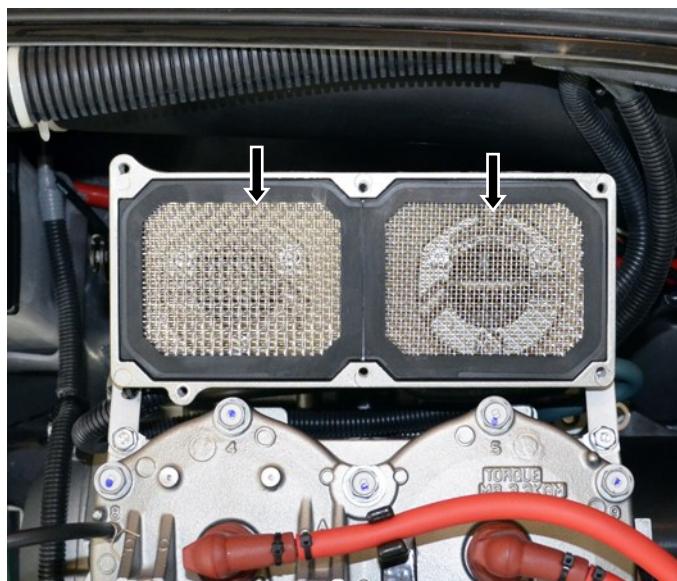


Inspect gasket. Replace if damaged or brittle.

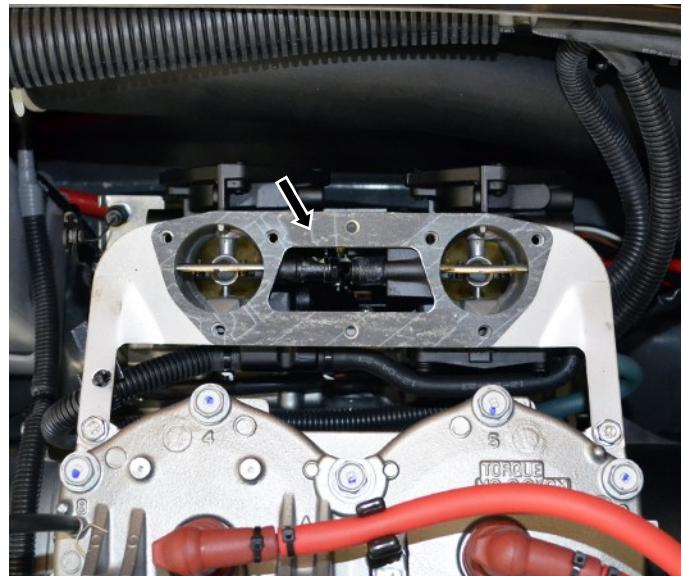

## **- INSTALLATION INSTRUCTIONS -**

Install supplied carburetor Power Filter adapters (2 total / 3 bolts each). **NOTE: Apply blue Loctite to bolts.**  
**Torque bolts to 11 Nm (8 ftlb).**

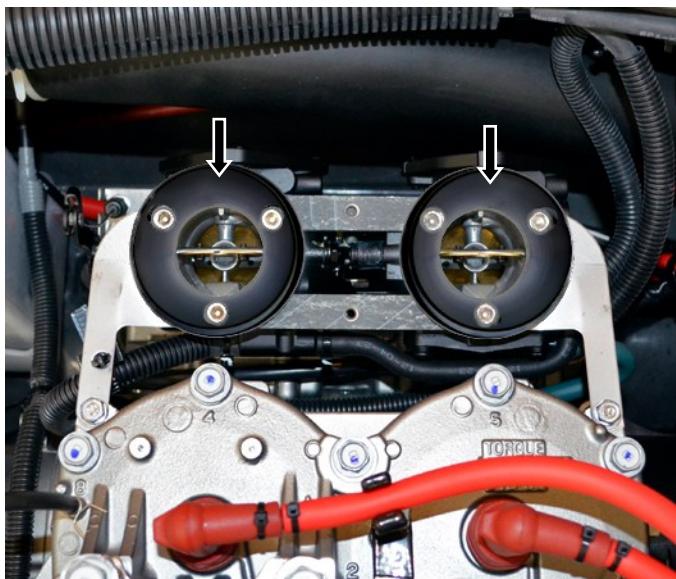

**TIP: Place bolts into adapters and then carefully place adapters onto carburetors!**

Place supplied pre-filters over supplied Power Filters.



Install Power Filters onto carburetor adapters and secure.  
**NOTE: Do not over tighten clamps. Check clamps periodically to ensure they are tight.**

***Remember, the water belongs to everyone.***

***Please ride responsibly and respect the environment!***

### **Technical Support**

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact:

RIVA Technical Support directly at (954) 247-0705 or by e-mail at [tech\\_support@rivaracing.com](mailto:tech_support@rivaracing.com).

### **Limited Warranty**

RIVA Power Filter Kits carry a 1-year limited warranty to the original purchaser. They are warranted to be free of defects in materials and workmanship under normal use and service. Customer modified components will be void of warranty. This warranty is limited to defects in the primary components only. Finish and/or wear marks in or on primary components are not covered under this warranty.

RIVA Racing's liability is expressly limited to the repair or replacement of the components contained within or associated with this kit. RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA Racing freight prepaid within the warranty period. Any equipment returned which, in RIVA's opinion, has been subjected to misuse, abuse, overheating or accident shall not be covered by this warranty.

RIVA Racing shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.

No other warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental or consequential damages and therefore the above exclusion or limitation may not apply to you.

Warranty does not include the expenses related to freight or transportation of parts or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice and a Return Authorization Number (RA#) must accompany all warranty claims.

Warranted replacement parts will be returned freight collect.