



RIVA RACING
PERFORMANCE PRODUCTS & ACCESSORIES

Pro-Series Sponsors

RY26210



Applications:

All Yamaha JetBlaster & EX/EXR models

Approximate Installation Time:

1 hr.

GET THE LATEST UPDATES!

Prior to installation, go to the RIVA Racing online Instruction Library to download the latest version of these instructions:

<https://rivaracing.com/instructions>

Recommended Specialty Tools:

N/A

Part #

Required Materials:

Blue Loctite

Part #

N/A



RIVA RACING
PERFORMANCE PRODUCTS & ACCESSORIES

Pro-Series Sponsors

RY26210

COMPONENT LIST

<u>ITEM</u>	<u>DESCRIPTION</u>	<u>RIVA PART #</u>	<u>QTY</u>	<u>NOTES</u>
A	Left Sponson Fin	RY26210	1	
B	Right Sponson Fin		1	
C	Right Sponson Mounting Plate		1	
D	Left Sponson Mounting Plate		1	
E	M8 x 30MM BHCS	.8C30SBCS	8	
F	M8 Wave Washer	.8NWAWS	8	
G	M8 x 40MM SHCS	.8C40SHCS	6	
H	M8 Flat Washer	.8NWTFS	6	
I	M8 x 16MM SFCS	.8C16SFCS	2	
J	Concave Nylon Washer	NY-RY26210-W	2	

Your kit was inspected and verified before being carefully packaged by our staff. Please check package contents before beginning assembly. If you have a question about missing or damaged items please contact RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivaracing.com.

We strongly recommend the use of a service manual to familiarize yourself with the various components and procedures involved with this installation. Please note that some of the original hardware removed in the disassembly process will be used in the installation process. These instructions have been written in step-by-step format and refer to illustrations. Read through instructions entirely before performing installation. Please follow these step-by-step instructions and illustrations carefully.

***** ALLOW ENGINE TO COOL COMPLETELY BEFORE PERFORMING INSTALLATION *****

***** NO SMOKING *** NO SMOKING *** NO SMOKING *****

Caution: Whenever using electric or battery operated tools inside the hull be sure it is well ventilated and no fumes are present. Failure to do so could result in a fire, or explosion and serious personal injury or death.

- INSTALLATION INSTRUCTIONS -

Remove OEM sponsons (4 bolts) and discard sponsons, bolts and collars.



Clean hull with a non-residual cleaner.


Install supplied Concave Nylon Washer and M8 x 16MM SFCS in forward-most bolt hole on each side of hull.

NOTE: 1 set per side. Apply blue Loctite to bolt. Do not overtighten.



Clean backside of supplied mounting plates.

Install supplied mounting plates using slot 2 as indicated below and secure using supplied M8 x 40mm SHCS and M8 flat washers. **NOTE: Apply blue Loctite to bolts. Torque to 12 ft•lb (16 N•m). DO NOT USE SLOT 1.**

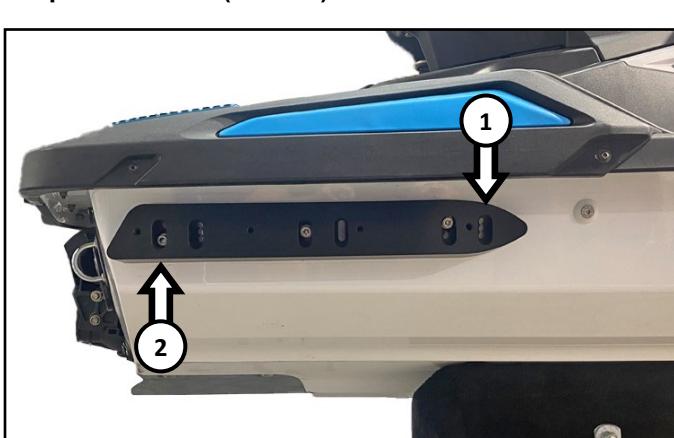

MOUNTING PLATE OPTIONS:

The mounting plates enable you to mount your sponsons at varying angles. The position shown above is considered level, or neutral, which will provide a tighter, more controlled riding experience. Raising the front and lowering the rear will provide a looser, more playful riding experience. **NOTE: Apply blue Loctite to bolts each time you adjust the position. Torque to 12 ft•lb (16 N•m). Be sure to position both sides at the same height and angle! DO NOT USE SLOT 1.**

Install supplied sponson fins using supplied M8 x 30MM BHCS and M8 flat washers. **NOTE: Apply blue Loctite to bolts. Do not overtighten.**



SPONSON FIN OPTIONS:

There are four mounting positions in each sponson fin insert to allow for vertical adjustment of the sponson fin. Installing the sponson fins in the lowest position results in more fin engagement in the water enabling tighter turns. Installing the sponson fins in the highest position results in less fin engagement in the water enabling the rear of the craft to slide more in turns. **NOTE: Apply blue Loctite to bolts each time you adjust the position. Do not overtighten. Be sure to position both sides at the same height!**

Remember, the water belongs to everyone.

Please ride responsibly and respect the environment!

Technical Support

For answers to questions regarding installation or trouble shooting RIVA Performance Products contact:

RIVA Technical Support directly at (954) 247-0705 or by e-mail at tech_support@rivaracing.com.

Limited Warranty

RIVA Pro-Series Sponsors carry a 30-day limited warranty to the original purchaser. They are warranted to be free of defects in materials and workmanship under normal use and service. Customer modified components will be void of warranty. This warranty is limited to defects in the primary components only. Finish and/or wear marks in or on primary components are not covered under this warranty.

RIVA Racing's liability is expressly limited to the repair or replacement of the components contained within or associated with this kit. RIVA Racing agrees to repair or at RIVA's option, replace any defective unit without charge, if product is returned to RIVA Racing freight prepaid within the warranty period. Any equipment returned which, in RIVA's opinion, has been subjected to misuse, abuse, overheating or accident shall not be covered by this warranty.

RIVA Racing shall have no liability for special, incidental or consequential damages or injury to persons or property from any cause arising from the sale, installation or use of this product.

No other warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose, applies. Various states do not allow for the limitation of incidental or consequential damages and therefore the above exclusion or limitation may not apply to you.

Warranty does not include the expenses related to freight or transportation of parts or compensation for any inconvenience or loss of use while being repaired. A copy of the original invoice and a Return Authorization Number (RA#) must accompany all warranty claims.

Warranted replacement parts will be returned freight collect.